
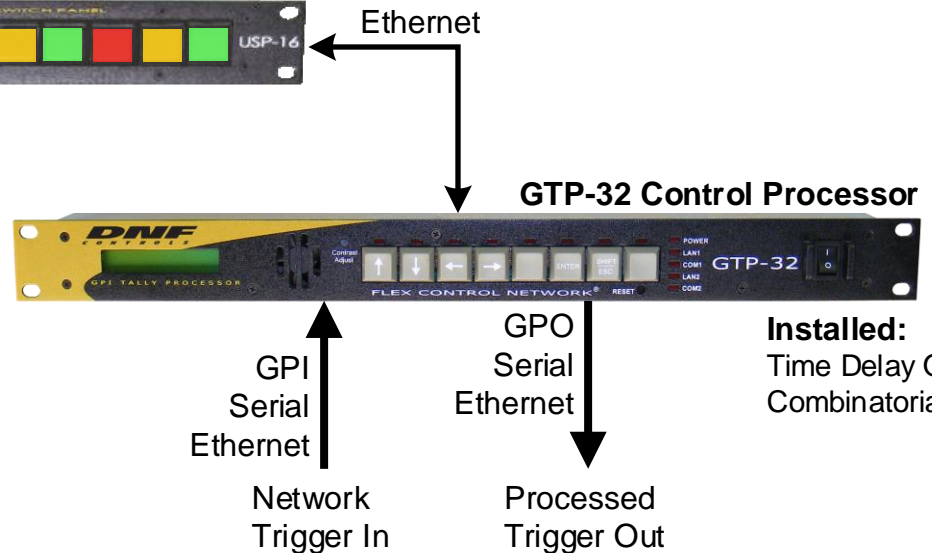


How To Delay Network Triggers

Universal Switch Panel (USP-16 Shown)

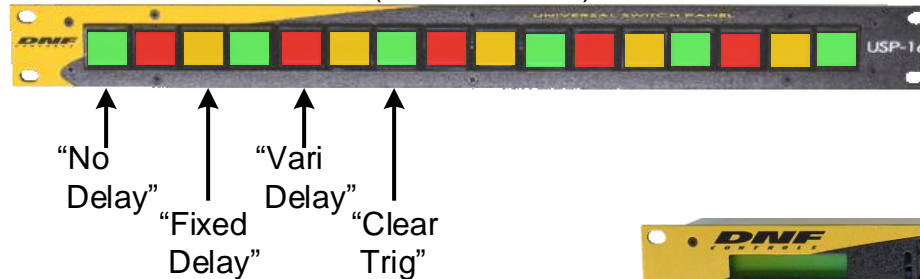

Installed:
 Time Delay Option
 Combinatorial Logic Option

SYSTEM OPERATION:

1. Press NO DELAY to pass network trigger without any delay. NO DELAY tallies red.
2. Press FIXED DELAY to delay network trigger by a pre-determined fixed time period. FIXED DELAY tallies red.
3. Press VARI DELAY to delay network trigger by a variable time period. VARI DELAY tallies red.

When network trigger is received, key tallies amber to identify a waiting trigger.

Operator presses the VARI DELAY key to activate the network trigger. VARI DELAY tallies red.

Or, the operator presses CLEAR TRIG to clear the network trigger. VARI DELAY tallies red.

SYSTEM VARIATIONS:

- Support multiple network triggers
- **FIXED DELAY-** Use multiple keys to select more than one fixed delay time period. Press the appropriate key to select the desired time period.
- Designate Network Trigger Disable key to disable all network triggers

Contact DNF Controls for more information or to request a demonstration:

Telephone: 818-898-3380

Email: sales@dnfcontrols.com