

Go-To Solutions that Save Time, Budget and Get the Job Done


NEW

IP Control Buddy™

Small Footprint, Big Performance

Controls any Ethernet, RS422, or RS232 enabled device

From a button push, GPI trigger, relay closure, web page button....

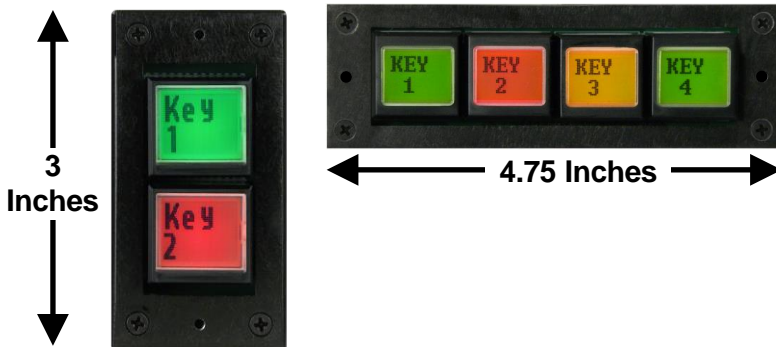


IP Control Buddy helps you:

Turn it on. Turn it off.
Start it. Stop it.
Open it. Close it.
Raise it. Lower it.
Enable it. Disable it.
And more...

IP Control Buddy makes it easy:

- One button press can:
 - Turn a GPI Output On or Off
 - Transmit a Serial Command
 - Transmit an Ethernet TCP, UDP, SNMP, or HTTP command
- Turn a GPI On or Off state into a Serial or Ethernet Command
- Receive a Serial & Ethernet Command to turn a GPI On or Off
- Models with 1, 2, or 4 LCD Pushbuttons or GPI Only
- Programmer-free, Browser-based Setup using drop-down menus & fill-in text boxes

IP Control Buddy helps you control it:

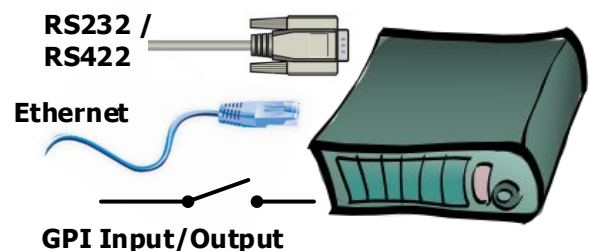

- Power Over Ethernet (POE)
- Optional External Power Supply
- Mounts in a 1-RU panel, desktop, or control surface

Other mounting needs? Contact us

Delivering Trusted Control Solutions for over 25 years

NEW

IP Control Buddy™

Small Footprint, Big Performance

EB-44



EB-44, EB-42, EB-41 & EG-4



EB-22 EB-22, EB-21

EB-44	EB-42	EB-41	EB-22	EB-21	EG-4
4- LCD Buttons	2- LCD Buttons	1- LCD Buttons	2- LCD Buttons	1- LCD Button	----
4- GPI Inputs	4- GPI Inputs	4- GPI Inputs	----	----	4- GPI Inputs
4- GPI Outputs	4- GPI Outputs	4- GPI Outputs	----	----	4- GPI Outputs
1- Serial Port RS422/RS232	1- Serial Port RS422/RS232	1- Serial Port RS422/RS232	----	----	1- Serial Port RS422/RS232
1- Ethernet 100BaseT Full Duplex	1- Ethernet 100BaseT Full Duplex	1- Ethernet 100BaseT Full Duplex	1- Ethernet 100BaseT Full Duplex	1- Ethernet 100BaseT Full Duplex	1- Ethernet 100BaseT Full Duplex
Power Over Ethernet	Power Over Ethernet	Power Over Ethernet	Power Over Ethernet	Power Over Ethernet	Power Over Ethernet
Horizontal & Vertical LCD Orientation	Horizontal & Vertical LCD Orientation	Horizontal & Vertical LCD Orientation	Horizontal & Vertical LCD Orientation	Horizontal & Vertical LCD Orientation	
4.75" W x 1.5" H x 2" D	4.75" W x 1.5" H x 2" D	4.75" W x 1.5" H x 2" D	3" W x 1.5" H x 2" D	3" W x 1.5" H x 2" D	4.75" W x 1.5" H x 2" D

GPI Inputs- Opto-isolated inputs with internal pull-up
 4- Input screw terminals
 1- Ground screw terminal

GPI Outputs: Open-collector Output
 4- Output screw terminals
 2- Ground screw terminal

Optional power supply available

Delivering Trusted Control Solutions for over 25 years