

Another Go-To Solution that Saves Time, Budget and Gets the Job Done

Introducing the SW2X1-9, A/B Switch Card



The Newest Member of the SW2X1 Control Routing family

- Use as 2 IN x 1 OUT or 1 IN x 2 OUT
- Passive IN to OUT (relay contacts)
Switch A 9-pin or B 9-pin to C 9-pin
- Front Panel: Select A or B
Lockout Front Panel switches
- Remote: 2- GPI Inputs: Select A / Select B
1- GPI Input: OFF= A, ON= B
- Mounts in SW2X1 Rackmount Housing
- ENABLE Switch eliminates errors

Front Panel



Block Diagram

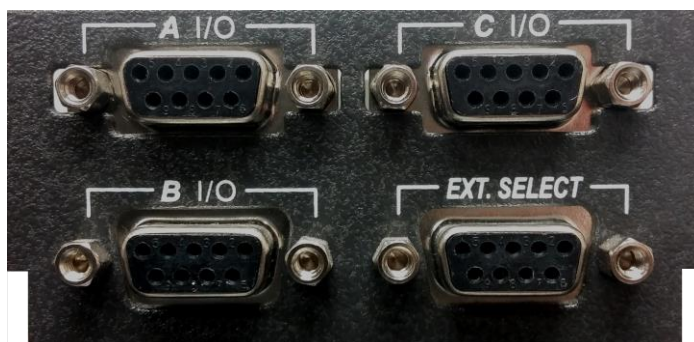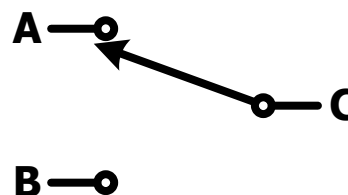

Rear Panel

IN ↔ OUT Relay contact ratings
Rated load: 0.50 A at 125 VAC, 1A 24 VDC
Carry current: 2 A
Max. operating voltage: 125 VAC, 60 VDC
Max. operating current: 1 A
Max. switching capacity: 62.50 VA, 30W
Contact resistance: 100 milliOhm

Delivering Trusted Control Solutions for over 25 years